



### Robot Stretch Wrap Machine



www.doverco.ca | sales@doverco.ca

2111 32nd Avenue, Montreal, Quebec, H8T 3J1 | 250 Trowers Road, Unit 7, Vaughan, ON L4L 5Z6

1.800.363.0697



#### **OPTIONAL**








Arya System







# FEATURES








SPECIFICATIONS	NEOS
Wrapping programs model NEOS:	Operating display 7" TOUCH with 99 Programs
Minimum pallet dimensions:	650 x 400 mm
Maximum pallet dimensions:	Pallet size can be programmed on the operating panel
Adjustable speed facilitated by frequency changer:	Max 65 m/min
Carriage braking system:	PS (ELECTRONIC PRE-STRETCH)
Standard wrapping height:	2200 mm
Optional wrapping height:	2400 / 2700 / 3000 / 3500 mm
Photocell detection of load height:	STANDARD SUPPLY
Adjustable Spool carriage speed facilitated by inverter:	From 1,3 up to 5,4 m/min
Upwards Spool carriage speed:	Independently settable
Downwards Spool carriage speed:	Independently settable
Lifting with fork lift truck:	STANDARD SUPPLY
Total installed power:	0.55 Kw
High frequency built-in battery charger:	120V 1PH 50/60 HZ
Standard charging voltage:	120V 1PH 50/60 HZ
Operating voltage:	24 V
Electrical and motor protection system:	IP 20
Output capacity:	35 Pallets per Hour *

<sup>\*</sup>Wrapping conditions and pallet dimensions have an influence on the maximum output capacity

<sup>\*\*</sup>Electronic adjustment from 120 to 350%

## MACHINE DIMENSIONS NEOS

#### **MACHINE DIMENSIONS IN MILLIMETERS**

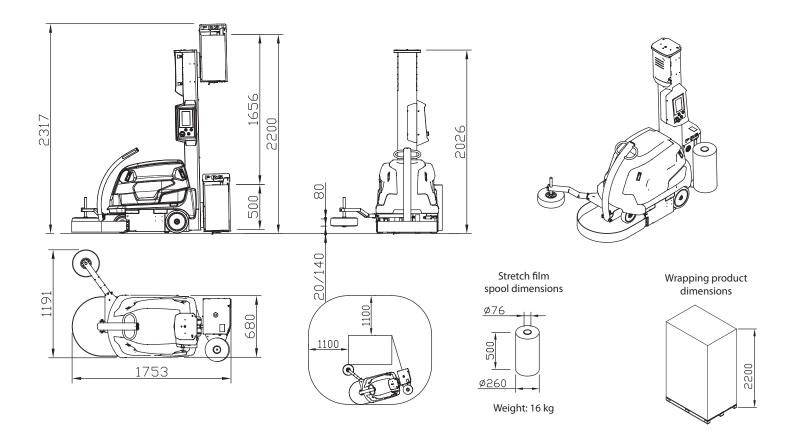

## WHY THE NEOS STRETCH WRAPPER?

Wrap palletized loads in less than a minute...any size, shape or weight

- · Compact size: easy to move and store
- · Maintenance free
- Wrap up to 35 pallets/hour
- Adjustable pre-stretch with powered rollers...save 40–50% over hand wrapping

**DOVERCO**Strategic. Packaging.