

Low Profile Semi-Automatic Stretch Wrappers

LOGIX PAKWRAPPERS



PW-6100

PW-6100-SC

PW-6100-TP

*with optional ramp

PW-6100-EX



PAKWRAPPER PW-6100

EXTENDED TOWER PAKWRAPPER PW-6100-EX



Quickly, safely and efficiently wraps loads



Protects loads during shipping, handling and storage




Fully programmable and adjustable to easily accommodate most loads

Wrap height 106"

Wrap height 80"

- Loaded pallet capacity: 1,500 kg (3,300 lb); 52 x 52"
- Shown with optional ramp

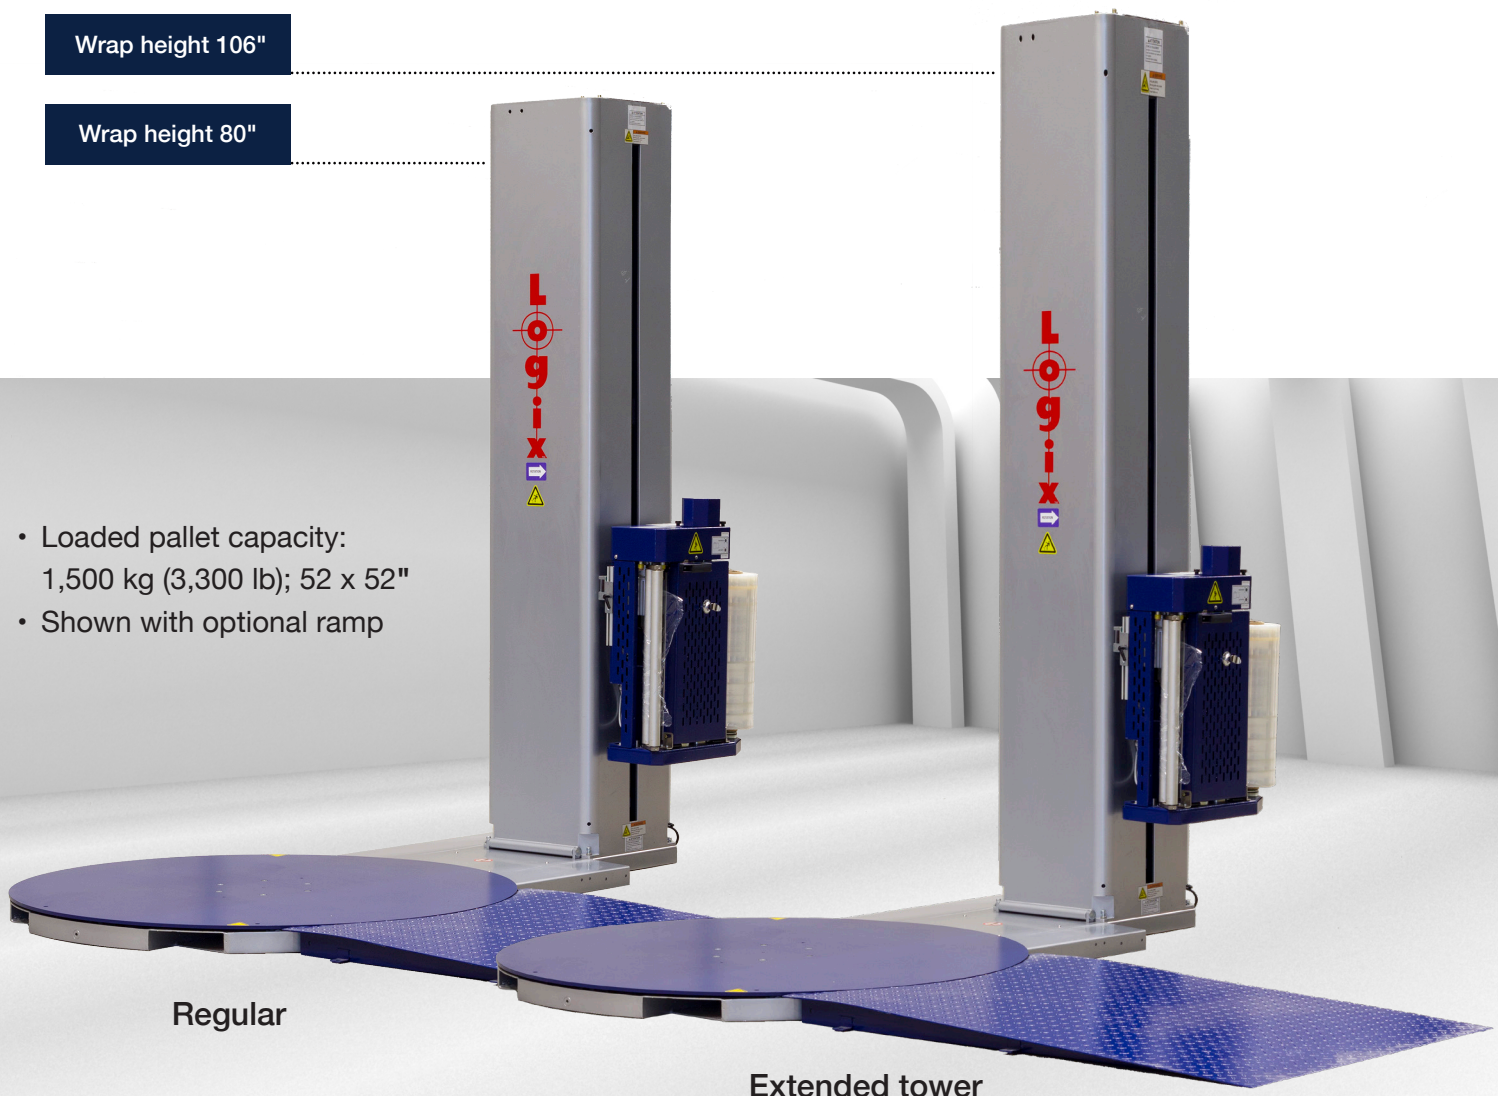

Regular

Extended tower

PAKWRAPPER TOP PRESS PW-6100-TP



Wrap unstable loads or loads that have light items that need to be supported



Protects loads during shipping, handling and storage



Fully programmable and adjustable to easily accommodate most loads

- All specifications as per the PW-6100
- Also available as extended tower model PW-6100-EX-TP



PAKWRAPPER WITH INTEGRATED SCALE PW-6100-SC



Improve your profitability by combining two operations; wrap and pallet weighing



Protects loads during shipping, handling and storage



Fully programmable and adjustable to easily accommodate most loads

- All specifications as per the PW-6100
- Place the scale's moveable display on the post or on the wall as required
- Also available as extended tower model PW-6100-EX-SC
- Scale capacity: 1,500 kg (3,300 lb)
- Scale precision: 100 g (1/4 lb)
- Forklift access only



Why the PakWrapper?

- Simple, versatile and easy to use for all your wrapping needs
- Safely wraps up to 20 loads per hour
- Programmable... equipped with a photo-eye height sensor
- Pre-stretch carriage provides 230% and 300% film stretch
- 52 x 52" maximum pallet size

All Logix equipment is CSA or equivalent special inspection certified for insurance compliance liability.



Top and bottom limit switches inside tower

Fully enclosed collapsible steel tower

Two drive chains inside tower for your safety

Covered motor and components

Easy loading film carriage

Bilingual controls (English & French)

Simple and easy adjustments

Film tension

Photo-electric eye

- Automatically senses and adjusts for the height of the load

Emergency stop

Turntable speed

Up-down carriage speed

Forklift slots

- Move the PakWrapper safely where you need it, when you need it!
- Movable from the front for easy positioning against a wall to minimize floor space use

Easily folded for quick transfer

Optional easy loading ramp

- Can be installed anywhere around the turntable
- Gentle grade enables easy loading with a pallet truck



Safety Foot Sensor

- Stops the descent of the carriage if an object is detected underneath



Photoeye detects the height of a pallet and is mounted on a track to permit quick adjustments

Most electronic components are popular brands and easily found locally: VFD, electrical switches, surge protectors, optical sensors and more

Schneider Electric variable speed controller for asynchronous motor

- Controls all 230V motors on the PakWrapper
- Gradual start and stop
- Electronic screen for each drive indicates alarm codes simplifying corrective measures
- Diagnostics for electric current and voltage as well as the rotating speed of motors




Door monitoring safety switch

- Disconnects power if door is open



Easy film loading

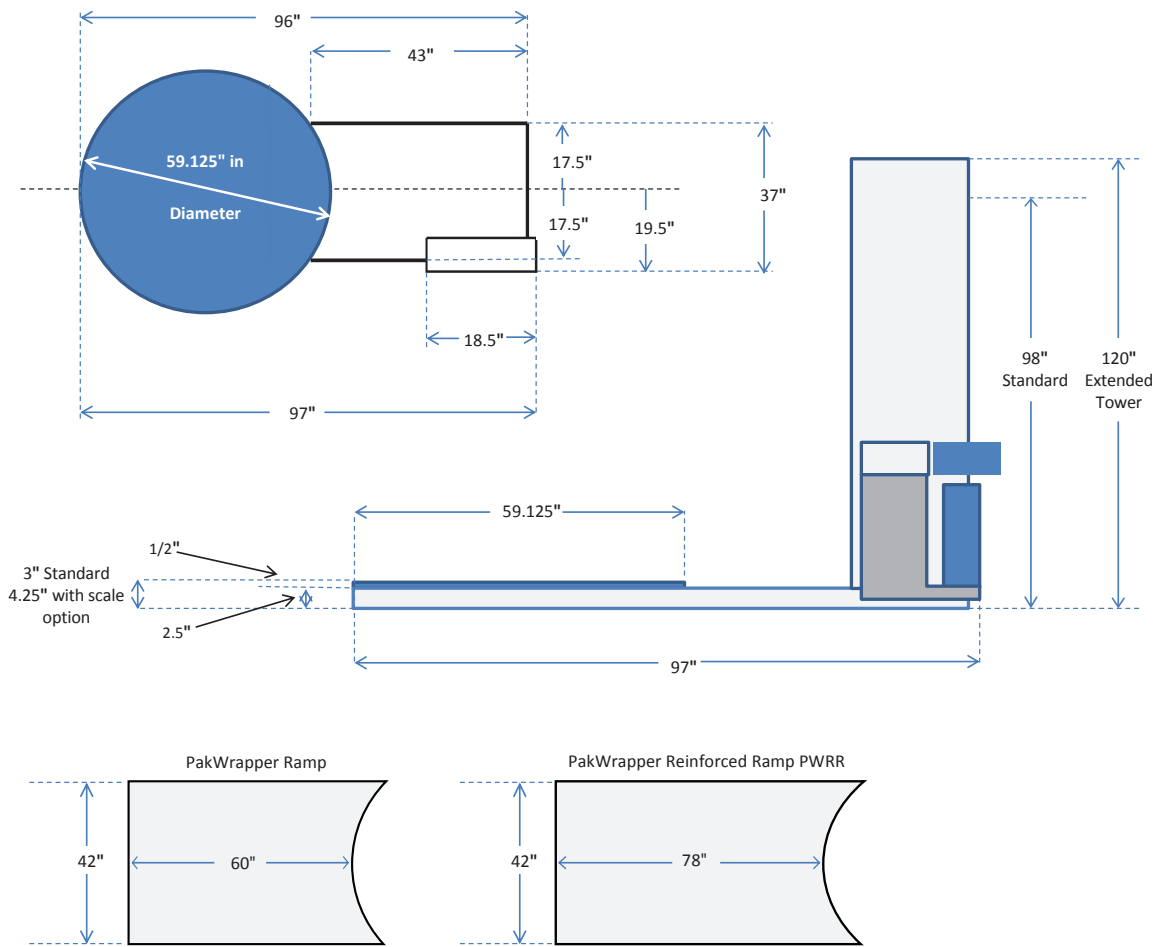

SPECIFICATIONS	
Table speed:	Adjustable from 0 to 12 RPM
Load capacity:	1500 kg (3300 lbs)
Programmable cycles:	User Interface
2 Pre-stretch capabilities:	230% and 300%
Production:	up to 20 skids per hour
Maximum load size:	52" x 52" x 78" (PW-6100) 52" x 52" x 106" (PW-6100EX)
Stretch film roll dimensions:	20"
Power requirements:	120 VAC 15 Amps (dedicated line)
Scale Capacity (PW-6100-SC):	1500 kg (3300 lbs)
Scale Precision (PW-6100-SC):	100g (1/4 lbs)
Variable film tension	
Carriage with variable speed	
Bilingual Controls (English & French)	

1-800-363-0697

Montreal: (514) 420-6060 | Vaughan: (289) 256-2141

2111 32nd Avenue, Montreal, Quebec H8T 3J1 | 250 Towers Road, Unit 7, Vaughan, Ontario L4L 5Z6

www.doverco.ca • sales@doverco.ca